

# Impact Wrenches

## UNIVERSAL APPLICATION

Pneumatic impact wrenches PSR are suited for manual tightening and screwing off the screws, nuts and bolts not depending on the status of screw joints.

Tightened screw shanks maximal diameters are shown in technical data for individual pneumatic impact wrench. When the connection is not tightened or screwed off during 5-7 sec. other method of tightening or screwing off must be used. Pneumatic Impact Wrenches have comaxit layer on their surfaces so operation in explo-sion-dangerous environment is not possible. Pneumatic impact wrenches are ideal for softer joints when high accuracy of tightening.



**Torque values:  
90 - 2100 Nm**

## LARGE SELECTION OF OUR ASSORTMENT

All our power tools excel through their high quality, ergonomic


design, simple and safe operation, low maintenance and a top-of-the-line power to weight ratio. We gladly help you select the

most suitable belt sander; please speak with our product specialists and refer to the technical data located in our catalogs.



*Impact Wrench  
Model SMP 085-1/2\"/>*

**SMP 140-1\"/>**

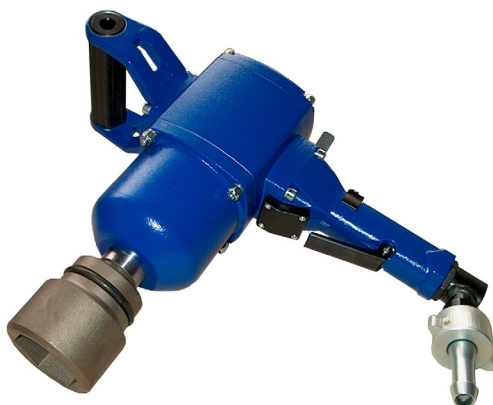

*Impact Wrench  
Model SMP 140-1\"/>*



*Impact Wrench  
Model PSR 36C-L*

## Pneumatic Impact Wrenches

### Advantages:

- long life span
- power output
- optimal maintenance
- ergonomic shape

### Pistol grip

**Torque capability: 90 - 1400 Nm**

**For screws: M 6 - M 36**



### Pistol grip + lever start

**Torque capability: 1450 - 2100 Nm**

**For screws: M 20 - M 36**



## Examples of Applications



## SAFETY SPECIFICATIONS

Observe all safety regulations, which are an inseparable component of each DEPRAG INDUSTRIAL tool. A safe operation of the tool and its correct function is only possible, if the instruction booklet has been read in detail and if the required instructions are observed.